

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 September 2001 (20.09.2001)


PCT

(10) International Publication Number  
**WO 01/68394 A2**

- (51) International Patent Classification<sup>7</sup>: **B60J** (74) Agent: DOBRUSIN, Eric, M.; Dobrusin Darden Then-  
nisch & Lorenz PC, Suite 311, 401 South Old Woodward  
Avenue, Birmingham, MI 48009 (US).
- (21) International Application Number: PCT/US01/06735
- (22) International Filing Date: 1 March 2001 (01.03.2001) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,  
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,  
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL,  
TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 09/524,961 14 March 2000 (14.03.2000) US
- (71) Applicant: L & L PRODUCTS, INC. [US/US]; 159  
McLean Drive, Romeo, MI 48065 (US).
- (72) Inventor: CZAPLICKI, Michael, J.; 1035 Pointe Place,  
Rochester, MI 48307 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,  
CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HEAT ACTIVATED REINFORCING SLEEVE

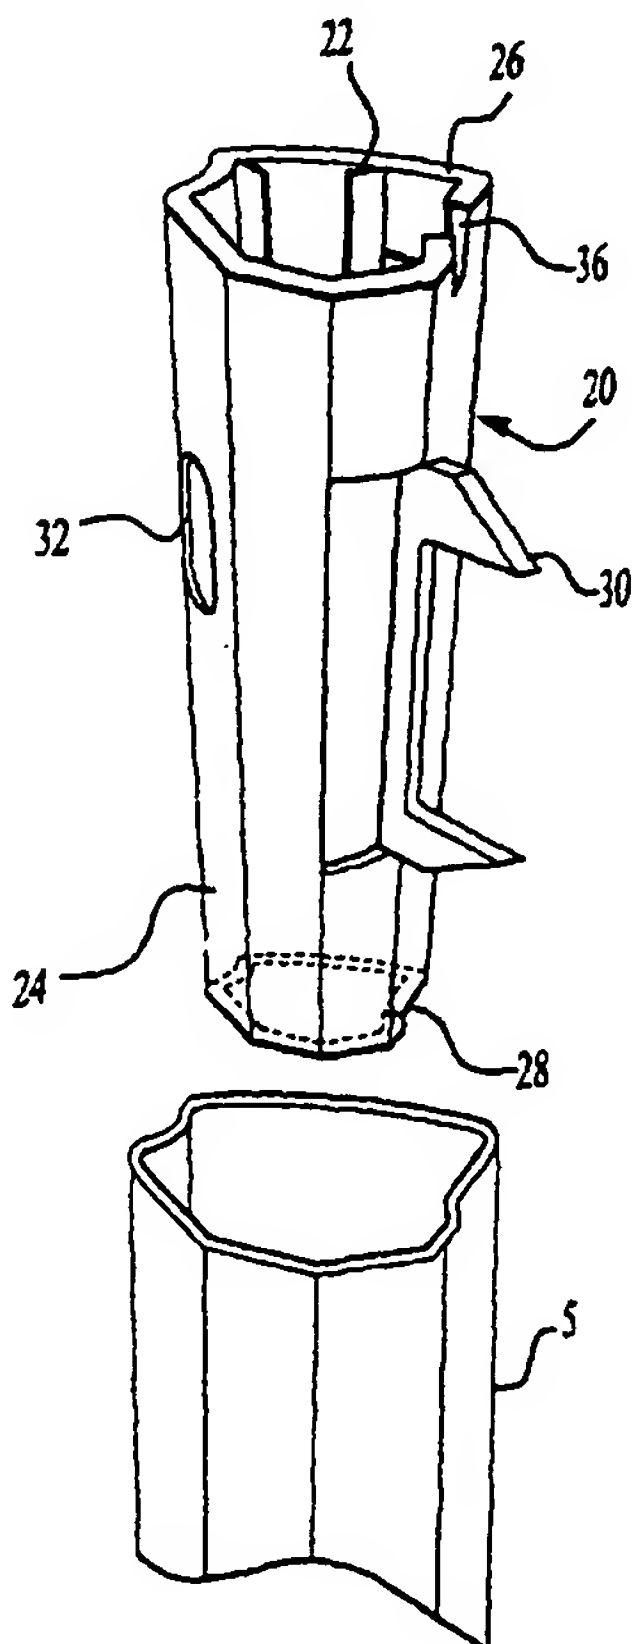

(57) Abstract: A reinforced sleeve (20) including a carrier (22) with a bracket (30) and a reinforcing medium supported by the carrier (22). The carrier (22) is an elongated polymer member, and the reinforcing medium extends along at least a portion of the length of the carrier (22). The reinforcing medium is preferably an epoxy-based resin. More particularly, the reinforcing medium is preferably a heat-activated structural foam (24).

WO 01/68394 A2



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## **HEAT ACTIVATED REINFORCING SLEEVE**

### **FIELD OF THE INVENTION**

5        This invention relates to a reinforced sleeve coupled to a frame assembly so as to increase the structural strength and stiffness of the frame at selected locations. More particularly, the invention relates to a sleeve coupled to the pillar portion of an automobile frame, wherein the sleeve supports a reinforcing medium that becomes chemically active and expands in response to a predetermined change in ambient  
10    conditions.

### **BACKGROUND OF THE INVENTION**

15        For many years the automobile industry has been concerned with designing improved vehicle body structures that absorb or deflect impact loads imposed on the vehicle at or near the passenger compartment. While reinforcing the surfaces surrounding the vehicle passenger compartment has long been practiced in the automotive industry, often the structures used to reinforce the frame surrounding the passenger compartment include metal components. These metal reinforcement  
20    members tend to add unwanted weight to the automobile. In other instances, the reinforcing members include complex configurations that require welding or mechanical fasteners to affix the reinforcement member to the frame.

      Consequently, there is needed a lightweight, easily installed apparatus for reinforcing the automobile frame structure, particularly in the area of the passenger  
25    compartment.

### **SUMMARY OF THE INVENTION**

      An object of the present invention is to define a reinforcing sleeve that enhances the capacity of an automobile frame assembly to dissipate energy from an  
30    impact load imposed on the vehicle frame to avoid deformation of the frame in special locations.

      To accomplish this and other objects, there is provided a sleeve including a carrier and a reinforcing, medium supported by the carrier. The carrier is fabricated from a polymeric material, and includes an interior and exterior surface.

The reinforcing medium extends along at least a portion of the length of the exterior of the carrier. The reinforcing medium is an epoxy-based resin. Preferably the reinforcing medium is a heat-activated structural foam that expands upon heating, typically by a foaming reaction. The preferred reinforcing materials are structural foams available from L&L Products of Romeo, Michigan under the designations L5206, L5207, L5208 and L5209.

The sleeve is formed by (1) providing a carrier; (2) reinforcing the carrier by applying a reinforcing medium thereto; and (3) heating the reinforcing medium to a temperature sufficient to cause the reinforcing medium to expand and adhere to adjacent surfaces, either via a bonding formulation in the reinforcing medium itself or via a separate adhesive layer.

A general method for installing the sleeve in a frame member includes (1) providing a carrier having a hollow portion; (2) coupling the sleeve to the carrier; and (3) heating the energy absorbing medium to a temperature sufficient to cause the reinforcing medium to expand, such as via activation of a blowing agent.

In one embodiment, the sleeve is coupled to a pillar portion of an automobile frame. The sleeve is received in the hollow portion of the pillar frame, wherein the sleeve includes a carrier and an reinforcing medium supported by the carrier. The reinforcing medium extends along at least a portion of the length of the carrier, and becomes chemically activated upon heating the foam to its thermal activation temperature.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

The features and inventive aspects of the present invention will become more apparent upon reading the following detailed description, claims and drawings, of which the following is a brief description:

FIG. 1 is an elevational view of a typical automobile frame assembly.

FIG. 2 shows a perspective view of a reinforced sleeve formed in accordance with the teachings of the invention.

FIG. 3 shows a cross-sectional view of the sleeve of FIG. 2 taken along the line 3-3.

FIG. 4 shows the sleeve of FIG. 2 in the uncured state installed in an automobile frame at the B-pillar portion of the frame.

FIG. 5 shows a cross-section view of the sleeve of FIG. 2 in the cured state installed in an automobile frame at the B-pillar portion of the frame.

### **DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS**

5 FIG. 2 shows a reinforced sleeve 20 formed in accordance with the teachings of this invention. The sleeve 20 includes a carrier 22 and a reinforcing medium 24 supported by the carrier 22.

10 The carrier 22 is an elongated member having open end portions 26, 28. At the end 26, the carrier 22 includes a U-shaped notch 36 and an elongated opening 32, each of which aligns with mating components on an automobile frame, or alternatively permits venting of the sleeve 20. At the opposite end 28, the carrier 22 defines an opening (not shown), which also aligns with mating components of an automobile frame or alternatively permits venting of sleeve 20. The exterior surface of the carrier 22 supports an outwardly extending C-shaped bracket 30 between the  
15 end portions 26, 28.

Internally, the carrier 22 is reinforced by an interior plate 40, as best seen in FIG. 3. The plate 40 is located approximately at the center portion of the carrier 22, and includes two openings 42, 44 for permitting the passage of components through the carrier 22. It will be appreciated that the openings 42, 44 may also permit  
20 ventilation of the carrier 22 if necessary.

The interior surface of the carrier 22 also supports reinforcing ribs 38. The ribs 38 extend axially along the carrier 20 beginning at each end 26, 28 and extending inwardly toward the plate 40. The ribs 38 terminate at the respective sides of the plate 40.

25 Preferably, the carrier 22 is fabricated of a moldable material. A preferred polymeric material is glass-reinforced nylon. The carrier 22 can be formed using known techniques such as injection molding, insert injection molding, die casting or blow molding. One advantage of the carrier 22 being fabricated of a moldable material is the ability to mold the carrier 22 into a variety of configurations.

30 Specifically, the carrier 22 can be fabricated using a mold having virtually the same configuration as the component to which the carrier 22 will be coupled or inserted. This facilitates assembling the carrier 22 with the mating component without the need for mechanical fasteners or welding.

Turning now to a discussion of the reinforcing medium 24, as seen in FIGS. 2, 4 and 5, the carrier 22 supports the reinforcing medium 24 along at least a portion of its exterior surface. The primary purpose of the reinforcing medium 24 is to increase the structural strength and stiffness of the sleeve 20. In the preferred embodiment, the reinforcing medium 24 is a structural foam. The structural foam 24 increases the compressive strength and structural stiffness of the sleeve 20 without adding significantly to the overall weight of the sleeve 20.

Typically, the structural foam 24 is applied to the carrier 22 in the areas where bonding contact and load transfer is needed. It will be appreciated that the structural foam 24 may encapsulate the entire carrier 22 or may be applied only at preselected locations. The structural foam 24 substantially covers the entire carrier 22 shown in FIG. 2. Note, however, that it is not necessary to substantially cover the entire surface of the carrier 22 in all applications in which the sleeve will be used. Instead, the structural foam 24 can be applied to selected areas on the carrier 22, leaving other portions of the carrier 22 uncoated. In the example shown in FIG. 2, only the end portions 26, 28 and the area of the C-shaped bracket 30 remain uncoated.

The structural foam 24 is generally applied to the carrier 22 in a solid or semi-solid state. The structural foam 24 is applied to the outer perimeter of the carrier 22 in a semi-solid state using commonly known injection techniques. During the application process, the structural foam 24 is heated to a temperature that permits the structural foam 24 to flow slightly. However, the temperature is not sufficient to cause the foam 24 to expand or cure. Upon cooling, the structural foam 24 hardens and adheres to the outer surface of the carrier 22. Where the carrier 22 is made of polymer, for example, it is possible to inject the structural foam 24 into the mold for the carrier 22 during the process of molding the carrier 22. This arrangement permits the structural foam 24 to substantially encapsulate the outer periphery of the carrier 22.

Alternatively, the structural foam 24 may be applied to the carrier 22 as precast pellets, which are heated slightly to permit the pellets to bond to the outer surface of the carrier 22. At this stage, the structural foam 24 is heated just enough to cause the structural foam 22 to flow slightly, but not enough to cause the structural foam 24 to thermally expand. Note that other expandable materials can be used, such as, without limitation, an encapsulated mixture of materials that, when activated by temperature, pressure, chemically, or by other ambient conditions, will expand.

The structural foam 24 is an epoxy-based material that may include an ethylene copolymer or terpolymer. A copolymer or terpolymer, is composed of two or three different monomers, respectively, i.e., small molecules with high chemical reactivity that are capable of linking up with similar molecules to create a polymer.

5 A number of epoxy-based structural reinforcing foams are known in the art and may also be used as the structural foam 24. A typical structural foam includes a polymeric base material, such as an epoxy resin or ethylene-based polymer which, when compounded with appropriate ingredients (typically a blowing agent, filler, curing agent, etc.), expands and cures in a reliable and predictable manner upon the  
10 application of heat or another activation stimulus. The resulting material has a density that is sufficient to impart desired rigidity to a supported article. From a chemical standpoint for a thermally-activated material, the structural foam 24 is usually initially processed as a thermoplastic material before curing. After curing, the structural foam 16 typically becomes a thermoset material.

15 An example of a preferred structural foam 24 formulation is an epoxy-based material that may include an ethylene copolymer or terpolymer commercially available from L&L Products of Romeo, Michigan, under the designations L5206, L5207, L5208 and L5209. One advantage of the preferred structural foam materials 24 over prior art materials is that the preferred materials can be processed in several  
20 ways. The preferred materials can be processed by injection molding, extrusion or with a mini-applicator type extruder. This enables the formulation and creation of part designs that exceed the capability of most prior art materials.

While the preferred materials for fabricating the structural foam 24 have been disclosed, the structural foam 24 can be formed from other materials provided that  
25 the material selected is heat-activated or otherwise activated by an ambient condition (e.g. moisture, pressure, time or the like) and expands in a predictable and reliable manner under appropriate conditions for the selected application. One such material is the epoxy based resin disclosed in U.S. Patent Application Serial No. 09/460,322, the teachings of which are incorporated herein by reference, filed with  
30 the United States Patent and Trademark Office on March 8, 1999 by the assignee of this application. Some other possible materials include, but are not limited to, polyolefin materials, copolymers and terpolymers with at least one monomer type an alpha-olefin, phenol/formaldehyde materials, phenoxy materials, and polyurethane materials with high glass transition temperatures. In general, the desired

characteristics of the structural foam 24 include high stiffness, high strength, high glass transition temperature (typically greater than 70 degrees Celsius), and good corrosion resistance properties.

In applications where a heat activated, thermally expanding material is employed, an important consideration involved with the selection and formulation of the material comprising the structural foam 24 is the temperature at which a material reaction or expansion, and possibly curing, will take place. For instance, in most applications, it is undesirable for the material to be active at room temperature or otherwise at the ambient temperature in a production line environment. More typically, the structural foam 24 becomes reactive at higher processing temperatures, such as those encountered in an automobile assembly plant, when the foam 16 is processed along with the automobile components at elevated temperatures or at higher applied energy levels. While temperatures encountered in an automobile assembly operation may be in the range of 148.89 °C to 204.44 °C (300 °F to 400 °F), body and paint shop applications are commonly about 121 °C (250 °F) or slightly lower. If needed, blowing agents can be altered by activation to cause expansion at different temperatures outside the above ranges.

Generally, prior art expandable foams have a range of expansion ranging from approximately 0 to over 1000 percent. The level of expansion of the structural foam 24 may be increased to as high as 1500 percent or more.

### INSTALLATION

FIG. 1 shows an automobile 1 having a front door aperture 2, a roof portion 3, an A-pillar 4 and a B-pillar 5. The front door aperture 2 is bounded in the longitudinal direction of the vehicle by the front or A-pillar 4, and the rear or B-pillar 5. At the bottom, the door aperture 2 is bounded by a sill 6, and at the top by the roof portion 3. The A-pillar 4, B-pillar 5, roof portion 2 and the sill 6 form a frame 7 that surrounds the passenger compartment, which is internally adjacent the door aperture 2.

Conventionally, the pillars 4, 5 are hollow beams having a closed profile. According to the present invention, the hollow center of the pillars 4, 5 each receive the sleeve 20 as best seen in FIG. 1, 2, 4 and 5. The sleeve 20 is configured such that the C-bracket 30, the opening 32 as well as other openings not shown in the

figures and the U-shaped portion 36 align with mating components formed or supported by the pillars 4, 5.

As seen in FIG. 4, when the sleeve 20 is installed in the pillar 5, there is a slight clearance between the interior of the B-pillar 5 and the sleeve 20. This is so because the structural foam 24 is in the uncured state and enables the structural foam 24 to bond to electrocoat-primed metal rather than non-primed metal. More particularly, the clearance permits electrocoat drainage, thereby allowing the primer to cover all of the metal surfaces to facilitate bonding of the structural foam and prevent corrosion of the metal.

FIG. 5 illustrates the position of the structural foam 24 in the automobile frame assembly after the curing cycle. As shown, the structural foam 24 adheres to the inner surface of the automobile frame assembly, substantially filling the gap between the inner surface of the pillar 5 and the sleeve 20.

The structural foam 24 is fully cured by subjecting the structural foam 24 to temperatures in the range of those generated by a paint oven of the type used to cure automobile body paint or primer. It will be appreciated that paint ovens are known to reach temperatures of 121 °C (250 °F) or greater. Thus, it will be appreciated that the structural foam may be cured by simply heating the sleeve to a temperature of 121 °C (250 °F) or greater.

The high temperatures used to cure the structural foam 24 also cause activation of the thermal expansion properties of the structural foam 24. The application of the structural foam 24 to the carrier 22 increases the structural strength and stiffness of the carrier 22. As a result, the overall structural strength and stiffness of the sleeve 20 is increased.

It should be understood that various alternatives to the embodiments of the invention described herein may be employed in practicing the invention. It is intended that the following claims define the scope of the invention and that the method and apparatus within the scope of these claims and their equivalents be covered thereby.

**CLAIMS****WHAT IS CLAIMED IS:**

1. A reinforced sleeve, comprising:  
5 an elongated hollow carrier having axially extending ribs on an interior wall; and  
a reinforcing medium supported by the carrier, wherein the reinforcing medium extends along at least a portion of the length of the carrier.
- 10 2. The reinforced sleeve as defined in Claim 1, wherein the carrier is made from a polymer composite.
- 15 3. The reinforced sleeve as defined in Claim 2, wherein the polymer composite is one selected from the group consisting of sheet molding compound, fiber reinforced polymer, and mineral reinforced polymer.
4. The reinforced sleeve as defined in any of the preceding Claims, wherein the carrier is coupled to an automobile frame system.
- 20 5. The reinforced sleeve as defined in any of the preceding Claims, wherein the reinforcing medium is an epoxy-based resin.
- 25 6. The reinforced sleeve as defined in any of the preceding Claims, wherein the reinforcing medium is a heat-activated structural foam that expands upon heating.
- 30 7. The reinforced sleeve as defined in any of Claims 1 to 6, wherein the carrier has an offsetting portion that creates a clearance between the sleeve and a surface of an automobile frame when the sleeve is coupled to the automobile frame.
8. An automobile pillar, comprising:  
an elongated hollow beam containing a reinforced sleeve as defined in any of Claims 1 to 7.

9. The reinforced sleeve as defined in any of claims 1 to 8, further including a bracket mounted on said elongated carrier.

5 10. A method for reinforcing a frame member comprising providing a carrier having a hollow portion, coupling a sleeve according to Claims 6 or Claim 7 to the carrier and heating to cause the reinforcing material to expand.

10 11. A method according to Claim 10, in which the frame member is a pillar portion of an automobile frame.

12. A method according to Claim 10 or Claim 11, in which the heat is applied to above 121°C.

15 13. A method according to Claim 12, in which the heat is applied at from 149°C to 205°C.

20

1/2

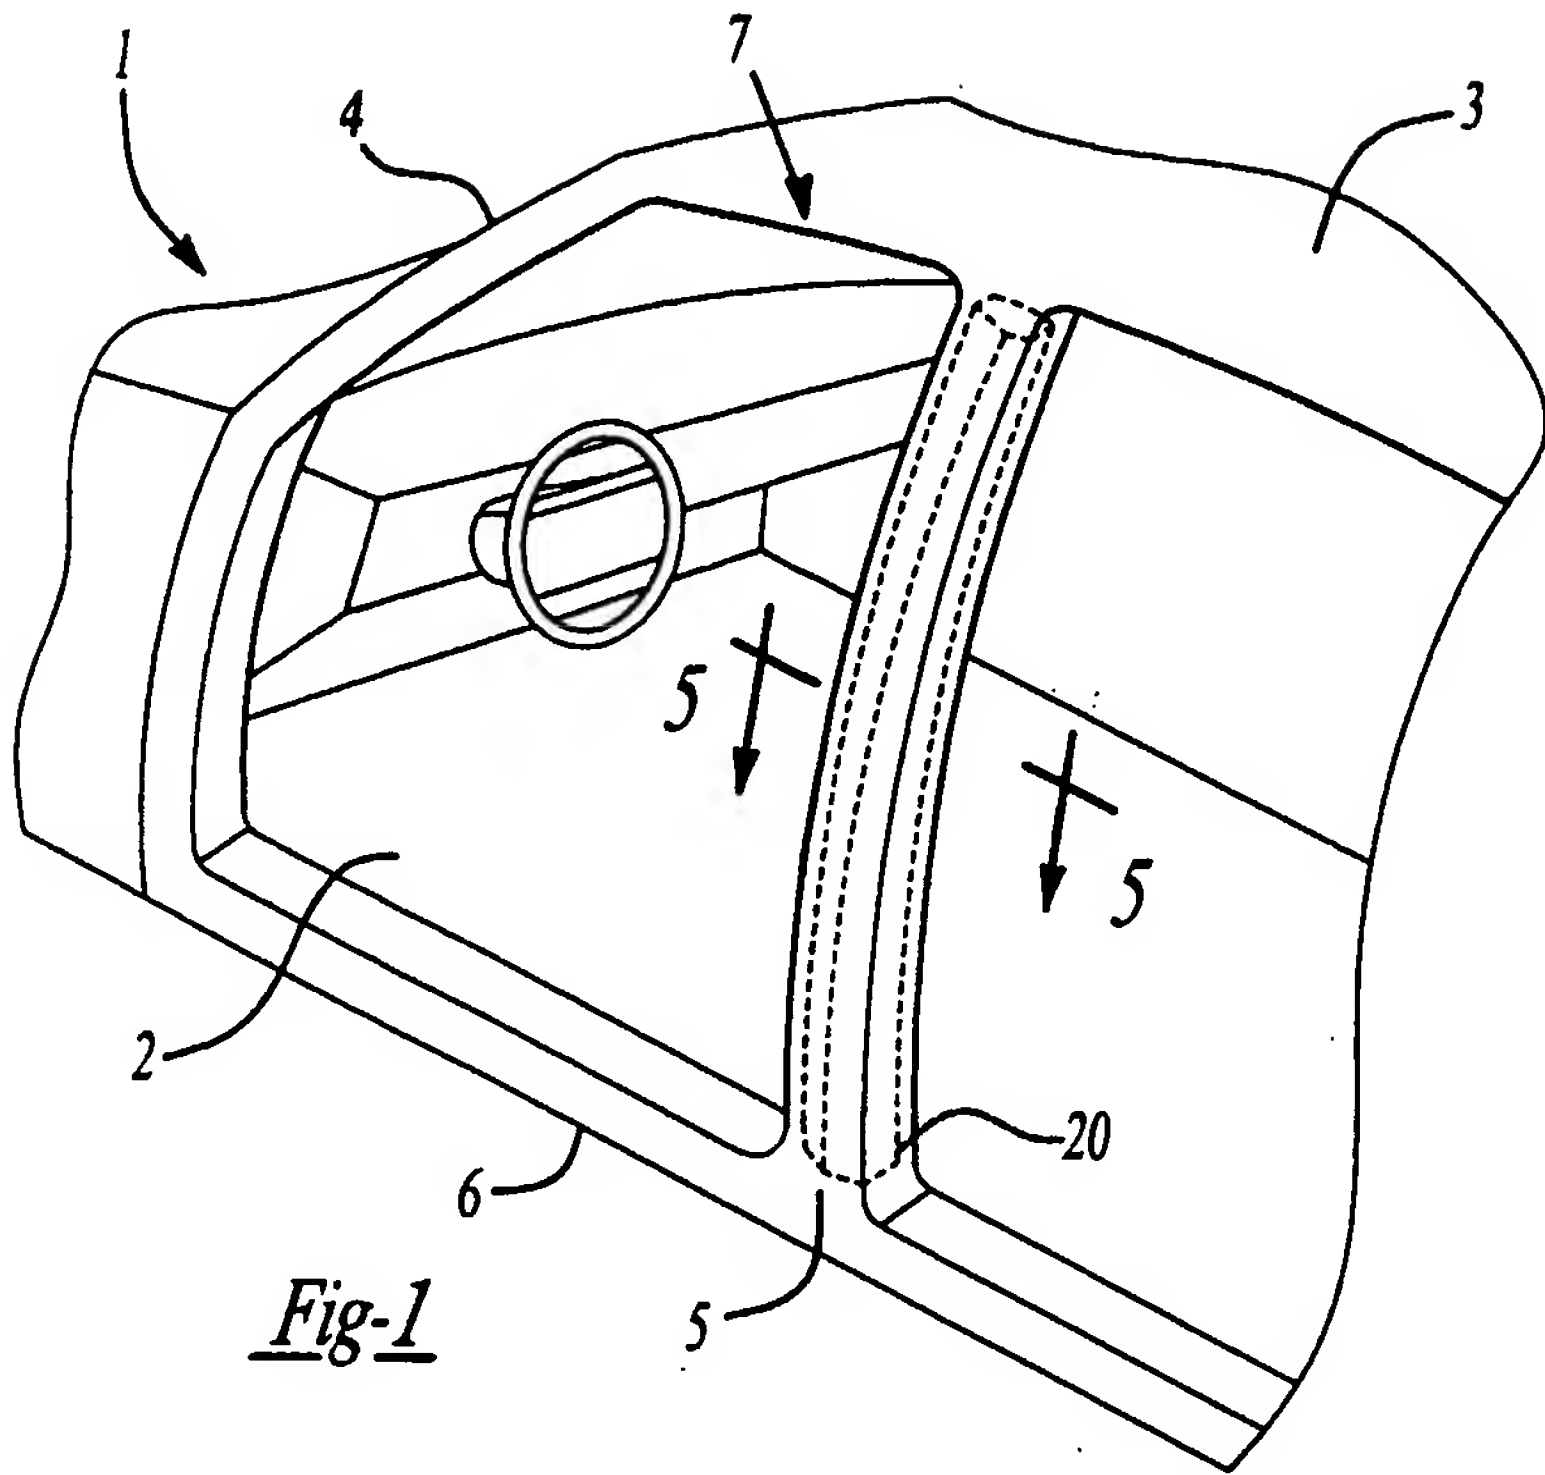
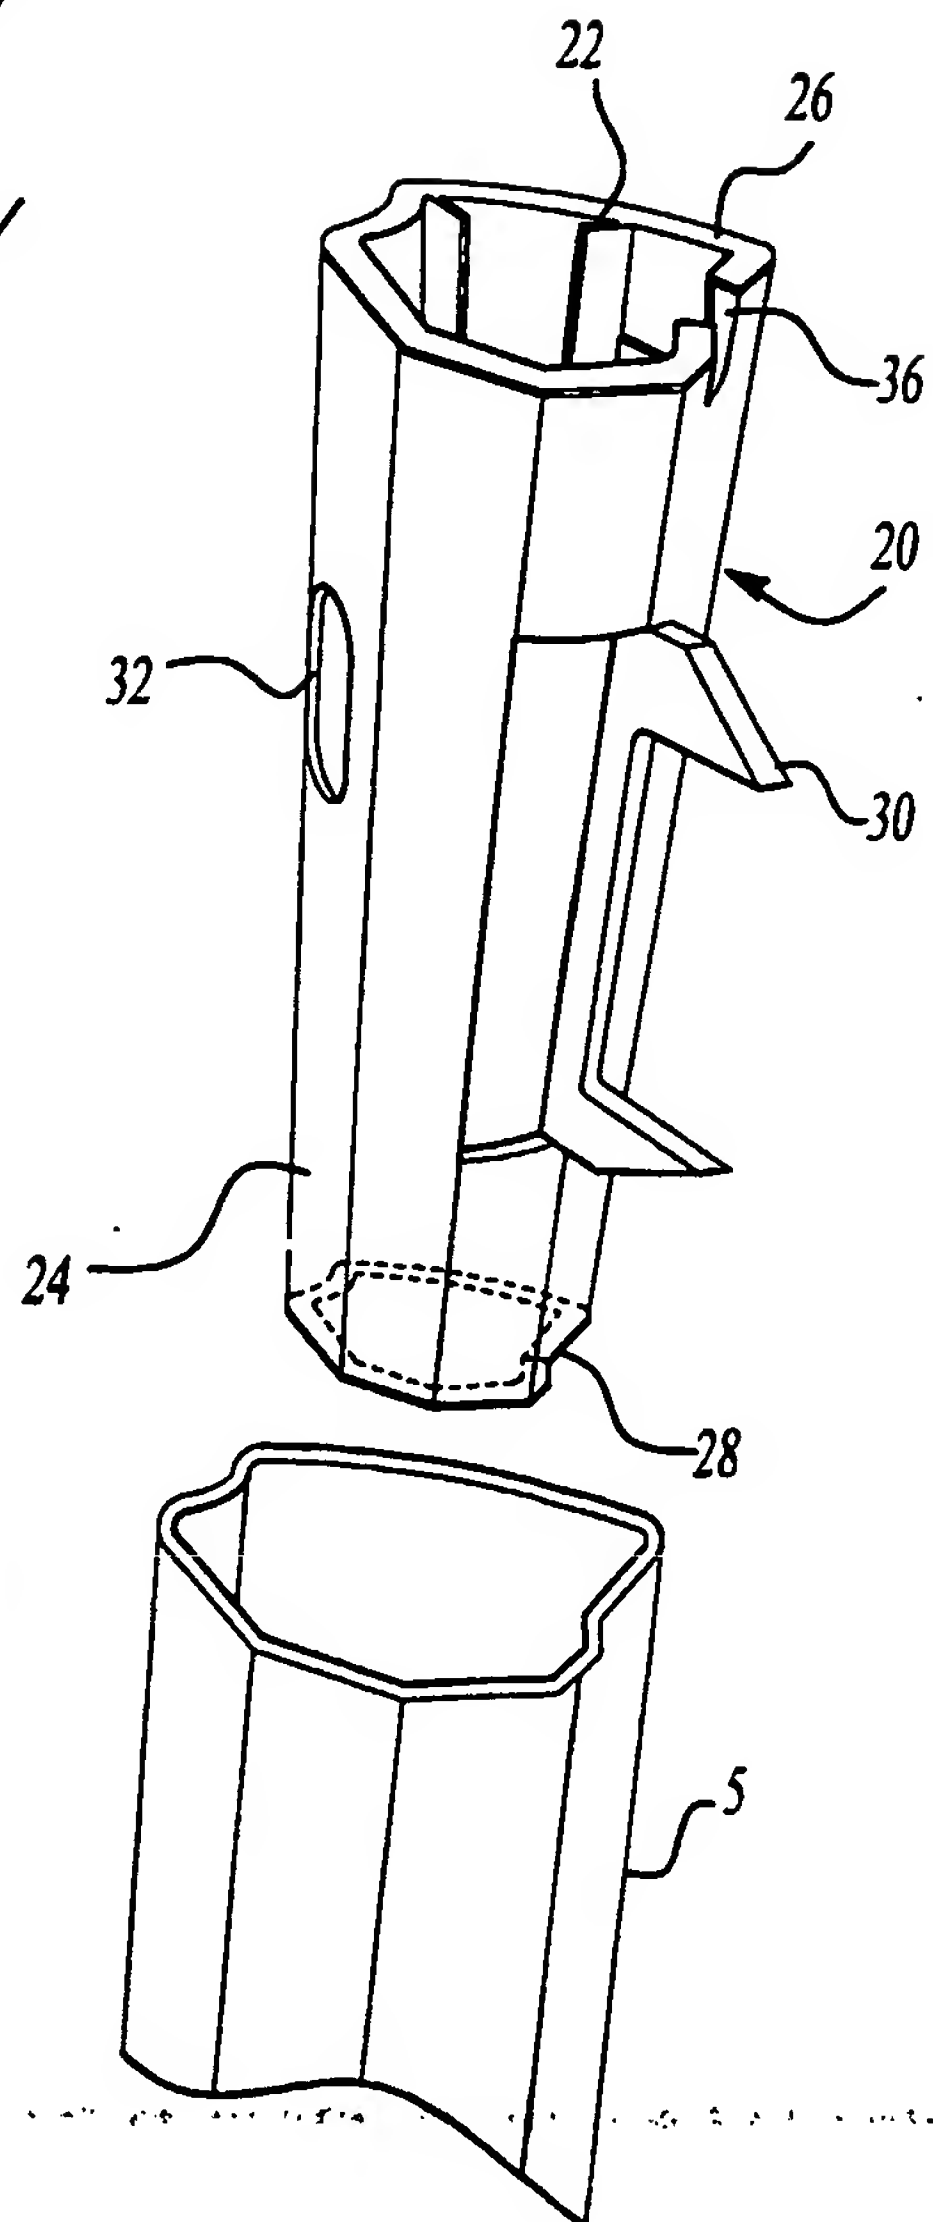


Fig-2



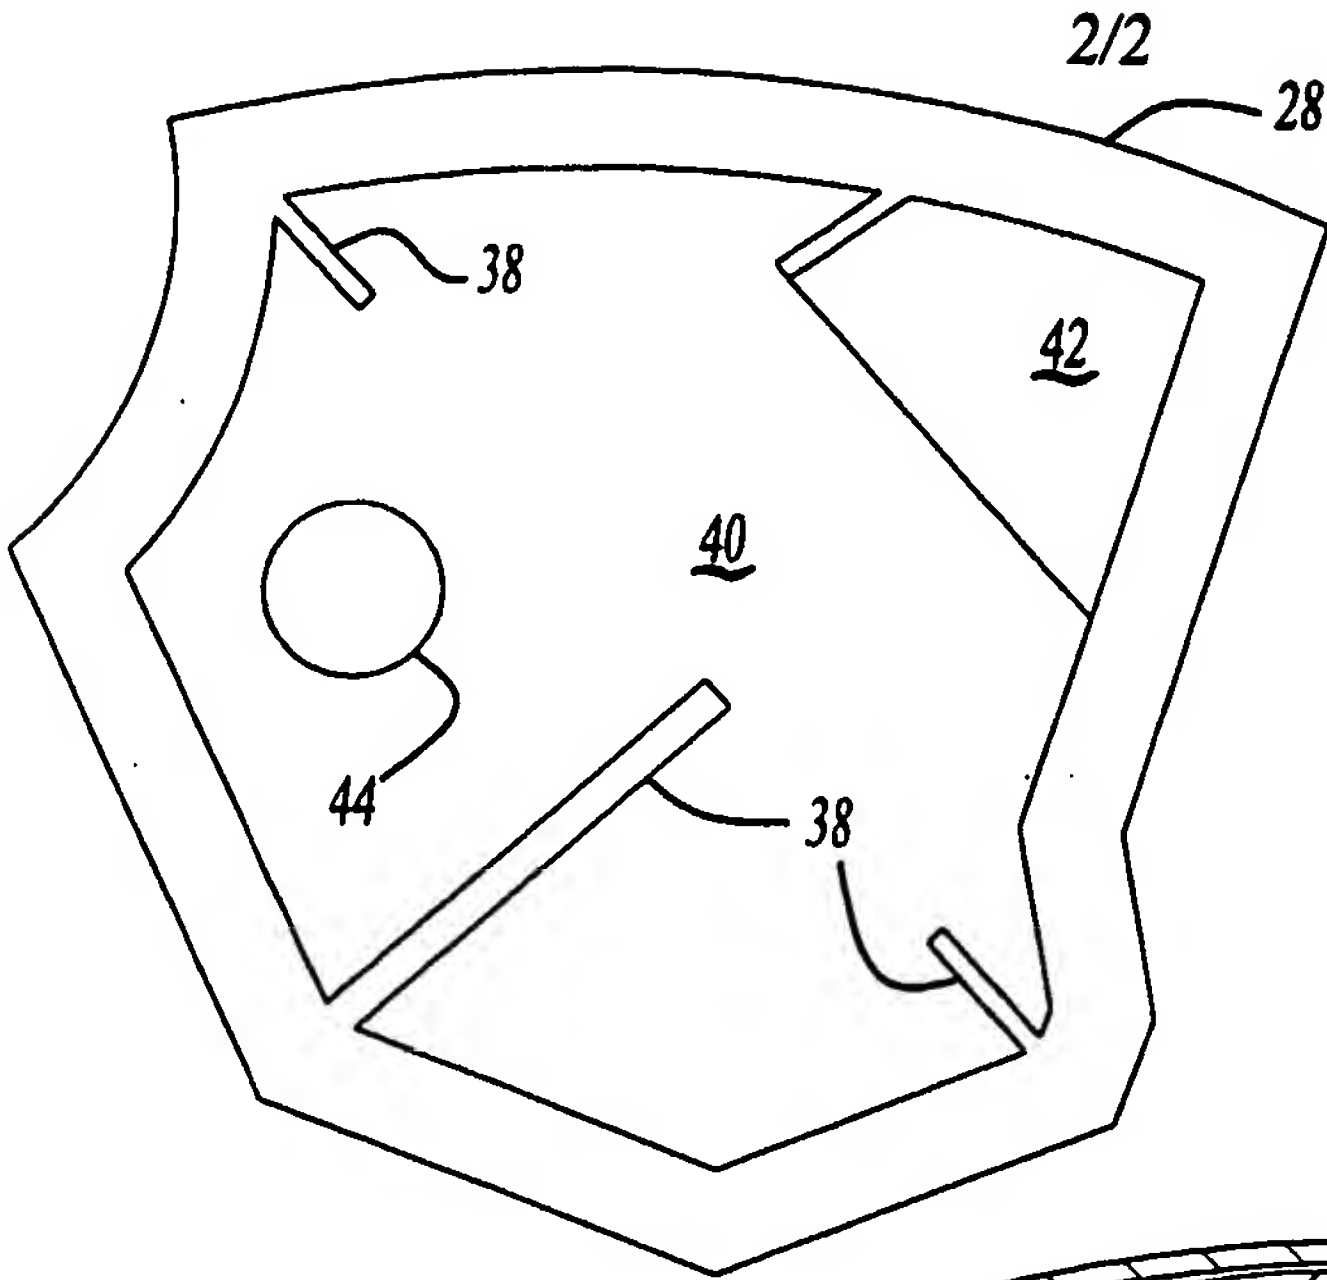


Fig-3

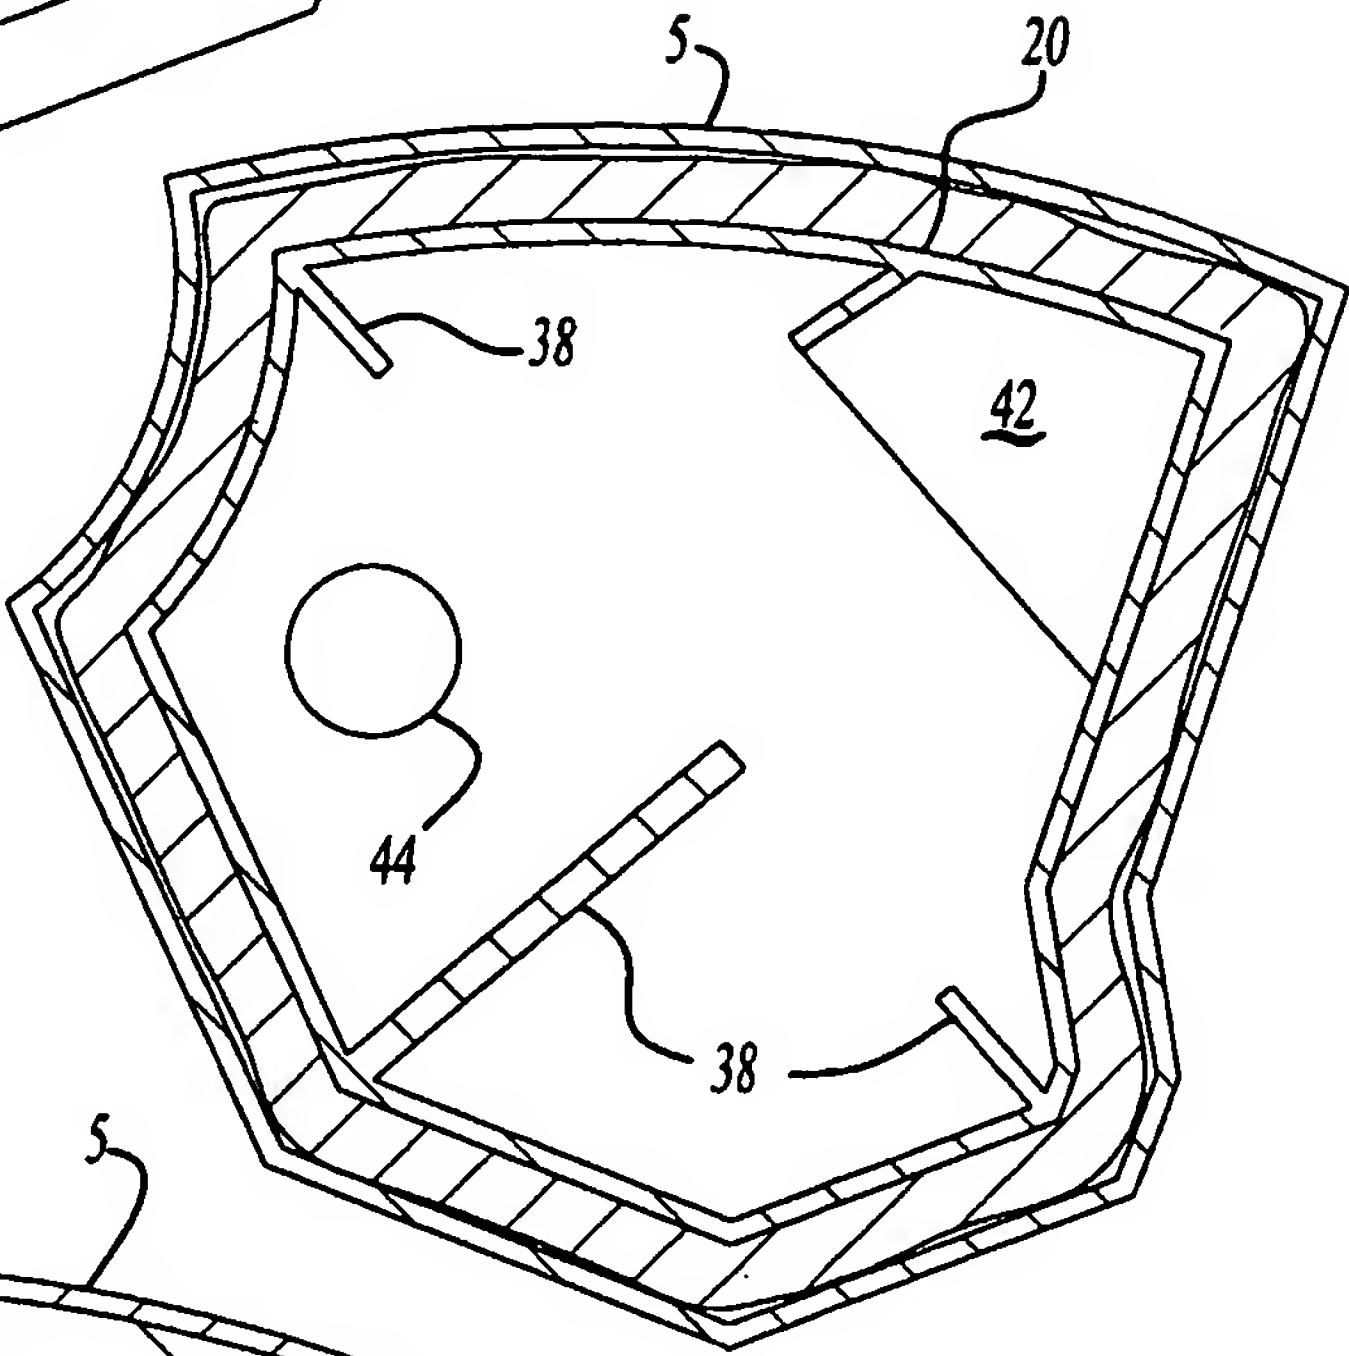


Fig-4

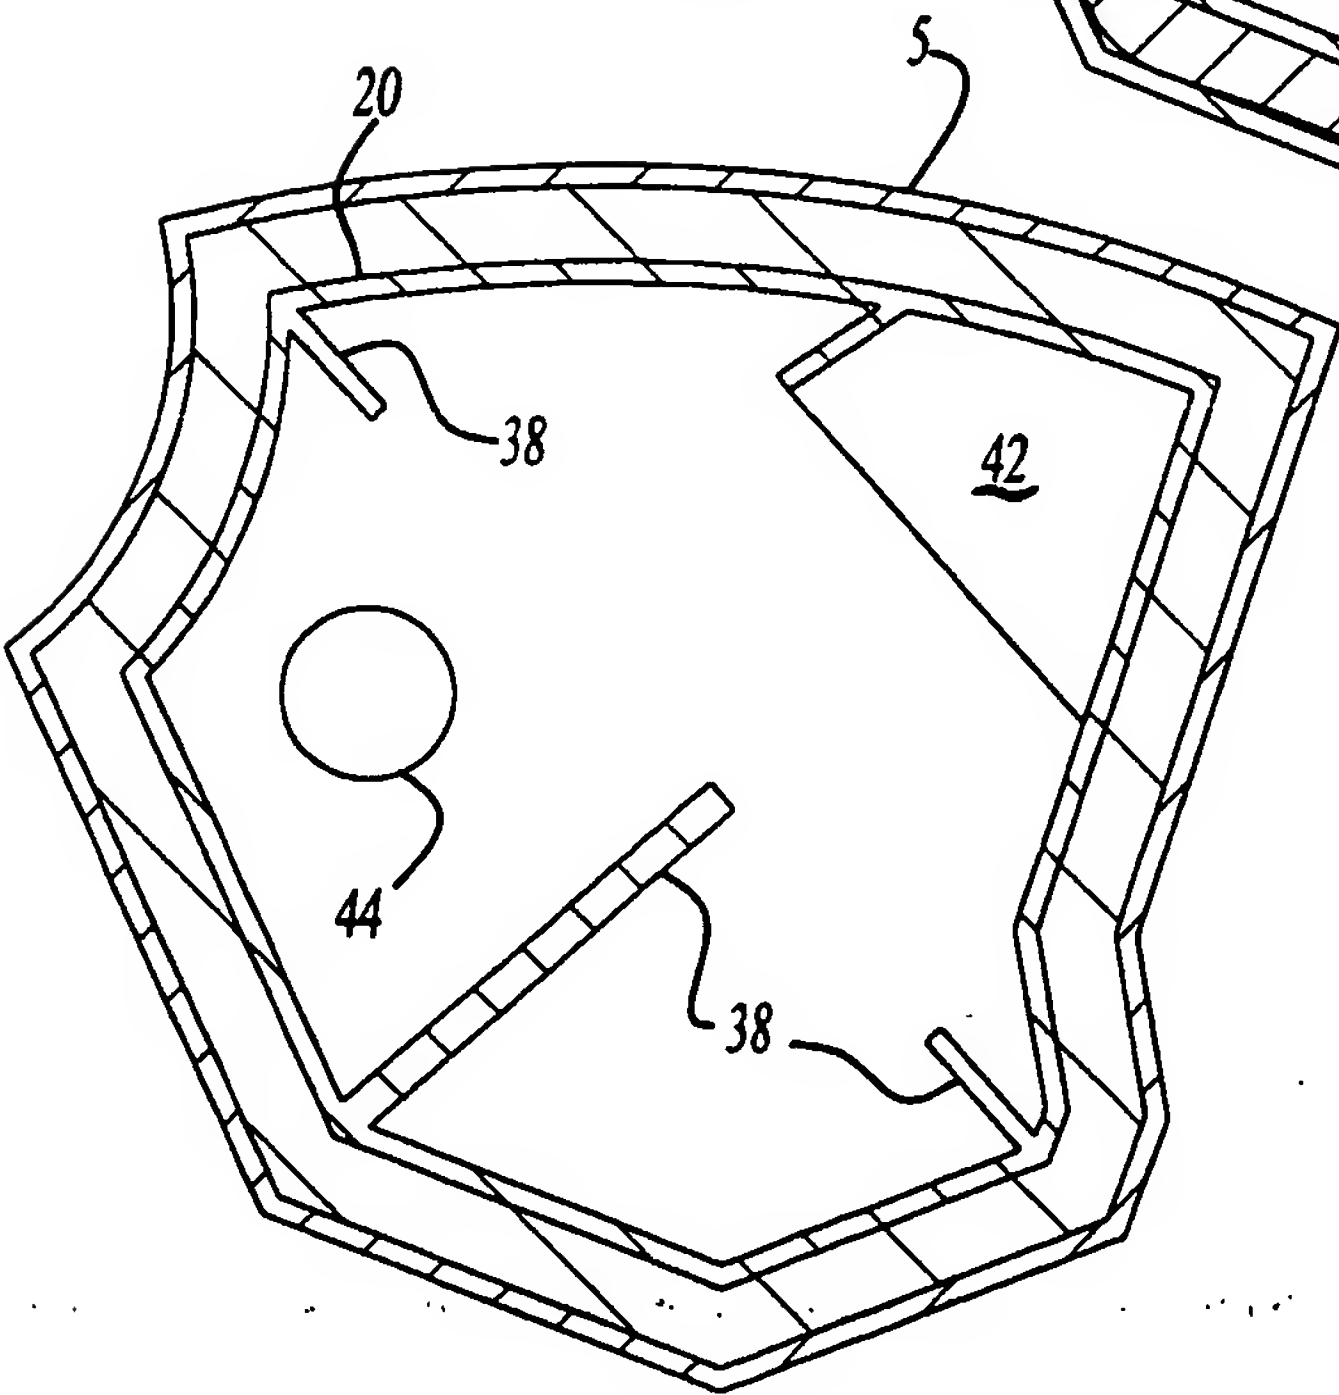


Fig-5

1. The first part of the document is a list of the names of the members of the committee who have been appointed to study the problem of the shortage of housing in the city of New York.

2. The second part of the document is a list of the names of the members of the committee who have been appointed to study the problem of the shortage of housing in the city of New York.

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
20 September 2001 (20.09.2001)

PCT

(10) International Publication Number  
WO 01/68394 A3

(51) International Patent Classification<sup>7</sup>: B62D 29/00, 25/04

(21) International Application Number: PCT/US01/06735

(22) International Filing Date: 1 March 2001 (01.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/524,961 14 March 2000 (14.03.2000) US

(71) Applicant: L & L PRODUCTS, INC. [US/US]; 159 McLean Drive, Romeo, MI 48065 (US).

(72) Inventor: CZAPLICKI, Michael, J.: 1035 Pointe Place, Rochester, MI 48307 (US).


(74) Agent: DOBRUSIN, Eric, M.: Dobrusin Darden Then-  
nisch & Lorenz PC, Suite 311, 401 South Old Woodward  
Avenue, Birmingham, MI 48009 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HEAT ACTIVATED REINFORCING SLEEVE

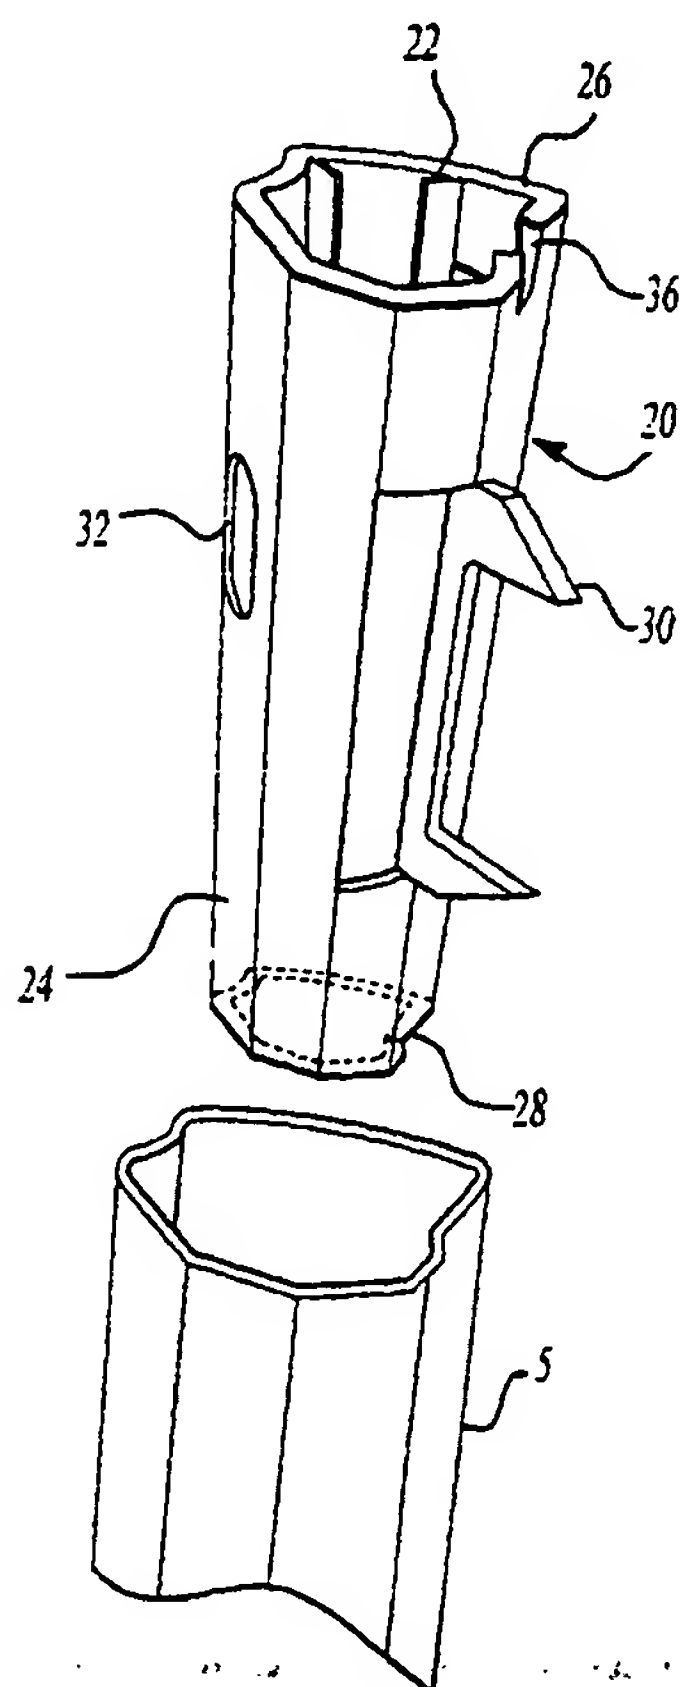

(57) Abstract: A reinforced sleeve (20) including a carrier (22) with a bracket (30) and a reinforcing medium supported by the carrier (22). The carrier (22) is an elongated polymer member, and the reinforcing medium extends along at least a portion of the length of the carrier (22). The reinforcing medium is preferably an epoxy-based resin. More particularly, the reinforcing medium is preferably a heat-activated structural foam (24).

WO 01/68394 A3



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**(88) Date of publication of the international search report:**

6 December 2001

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/06735

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B62D29/00 B62D25/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B62D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 97 43501 A (HENKEL CORP ; WYCECH JOSEPH S (US)) 20 November 1997 (1997-11-20) page 3, line 24 - page 4, line 14; figure 5 ---	1-8, 10, 11
X	GB 2 156 412 A (BKL EXTRUSTIONS LIMITED) 9 October 1985 (1985-10-09) page 1, line 81 - line 94; figure 1 ---	1
P, X	DE 198 58 903 A (OPEL ADAM AG) 21 June 2000 (2000-06-21) column 4, line 9 - line 29; figure 1 -----	1-13

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

30 August 2001

Date of mailing of the international search report

07/09/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Wiberg, S

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/06735

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9743501 A	20-11-1997	AU 722554 B	03-08-2000
		AU 3059897 A	05-12-1997
		BR 9708940 A	03-08-1999
		CA 2253792 A	20-11-1997
		CN 1218529 A	02-06-1999
		CZ 9803575 A	16-06-1999
		DE 897439 T	02-06-1999
		EP 0897439 A	24-02-1999
		ES 2134751 T	16-10-1999
		JP 2000510931 T	22-08-2000
		PL 329833 A	12-04-1999
		TR 9802279 T	22-02-1999
		US 6058673 A	09-05-2000
GB 2156412 A	09-10-1985	NONE	
DE 19858903 A	21-06-2000	AU 2277700 A	12-07-2000
		WO 0037302 A	29-06-2000